



BIOWIZARD KV

Product Safety Cabinet

GENERAL

Safe, reliable and economic safety cabinet for protection of the work item including ergonomic practical properties needed in normal work.

TECHNICAL INFORMATION

Materials and finishing

All materials and surfaces are smooth and resistant to cleaning and disinfection agents.

Windows

Front screen and side panels are made of shock-resistant laminated safety glass.

Lighting

Glare-free and shadow-free fluorescent lighting providing illumination on work surface 1500 lux

Standard equipment

- Flow control with digital display
- Alarms for false flow speed and door position
- ½ speed via switch
- Hour counter
- UV outlet via switch
- Base stand 700, 800 or 900 mm

Filters

HEPA H 14 99,995 % MPPS
acc. to EN 1822

Air speed


Down flow 0,4 m/s ± 20%

Sound level

The sound level with clean filters is 55 dB. acc. to EN 12469

Options

- Sockets
- Gas tap

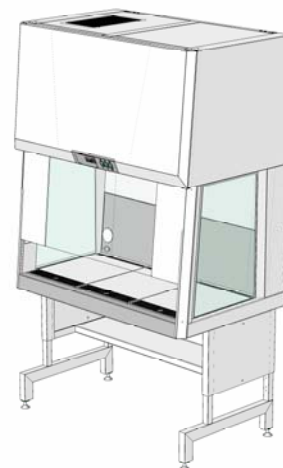

Biowizard KV	100	130	170	200
Total width / depth (mm)	975 / 790	1280 / 790	1625 / 790	1930 / 790
Working space (mm)				
Width	885	1190	1535	1840
Depth	600	600	600	600
Height	720	720	720	720
Power (max. W)	850	1120	1490	1510
Weight (incl. base stand kg)	180	240	290	330

Manufacturing Plant and Head Office: Teollisuustie 3, FIN-35700 Vilppula, Finland

Tel. + 358-(0)3-471 7000,

Fax + 358-(0)3-471 7077, <http://www.kojair.com>, sales@kojair.com